6. Exploded View & Parts List

6-1 CS29V10MHPXUMG

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

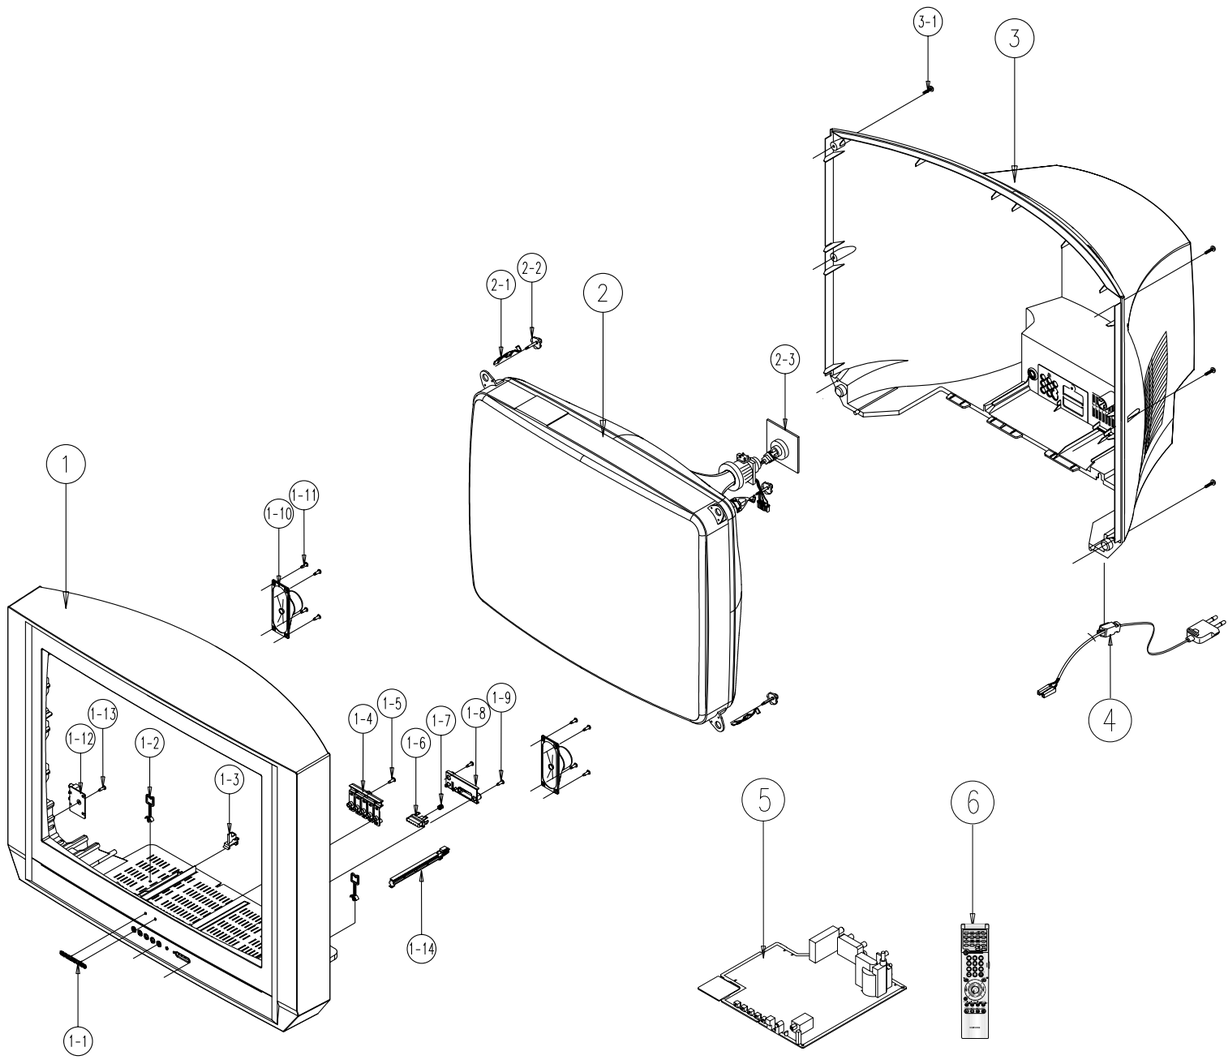

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01479M	"ASSY COVER P-FRONT;29V10,(SPK)4EA,HIPS,H"		1	T0003	
1*	AA64-03437C	"CABINET FRONT;29V10,HQ,HIPS,HB,G4309,SV0"		1	CIS3	S.N.A
1-1	AA64-70117B	"BADGE-BRAND;,AL,T1.5,10.6,L65,BLK,SILVER"		1	T0057	S.N.A
1-2	AA65-00011C	"CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,"		1		S.N.A
1-3	AA61-40113A	"STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-"		1	T0607	S.N.A
1-4	AA64-03439A	"KNOB-CONTROL;29V10,ABS,HB,G3676,SVM3012"		1	T0022	S.N.A
1-5	6003-001019	"SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR"		2	T0081	
1-6	AA64-03438A	"KNOB-POWER;29V10,ABS,HB,G3676,SVM3012"		1	T0023	S.N.A
1-7	AA61-60003J	"SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,"		1	CIS7	S.N.A
1-8	AA64-03440A	"WINDOW-RMC;29V10,PC,CLR"		1	T0603	S.N.A
1-9	6003-001019	"SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR"		1	T0081	
1-10	AA96-00358D	"ASSY SPEAKER;-,16OHMX2,5WX2,3001-001072,"		1		S.N.A
1-11	6003-001019	"SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR"		16	T0081	
1-12	AA95-03194A	"ASSY SUB PCB-SIDE A/V;S56A,B-LOT"		1	T0091	
1-13	6003-001268	"SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR"		1	T0081	
2	AA91-06067A	ASSY CPT;CS29D8WTPX/XSG		1		S.N.A
2-1	AA65-30017A	"CLAMPER CORE-D,COIL;-,NYLON-66,V0,-,NTR,"		2	D-COIL	S.N.A
2-2	AA60-10050R	"SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-"		4	SC016	S.N.A
2-3	3704-001105	"SOCKET-CRT;11P,20PI,26.5PI,NI,-"		1	V999S	
3	AA64-03044A	"CABINET-BACK;29V5,HIPS,FV2,GR503"		1	T0015	
3-1	AA60-10050T	"SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,"		7	T0081	S.N.A
4	AA96-20126B	"ASSY POWER CORD;-,EP3/YES(HK),H/C300,MP5"		1	T0066	S.N.A
5	AA94-13535Q	"ASSY PCB MAIN;SN-CS29V10MHPXUMG,S56A,SDI"		1	T0073	
6	AA59-00312A	"REMOCON;DEEP IMPACT,TM75,36,TTX,EX,PAL"		1	T0074	

6-2 CS25K10MHPSBWT

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

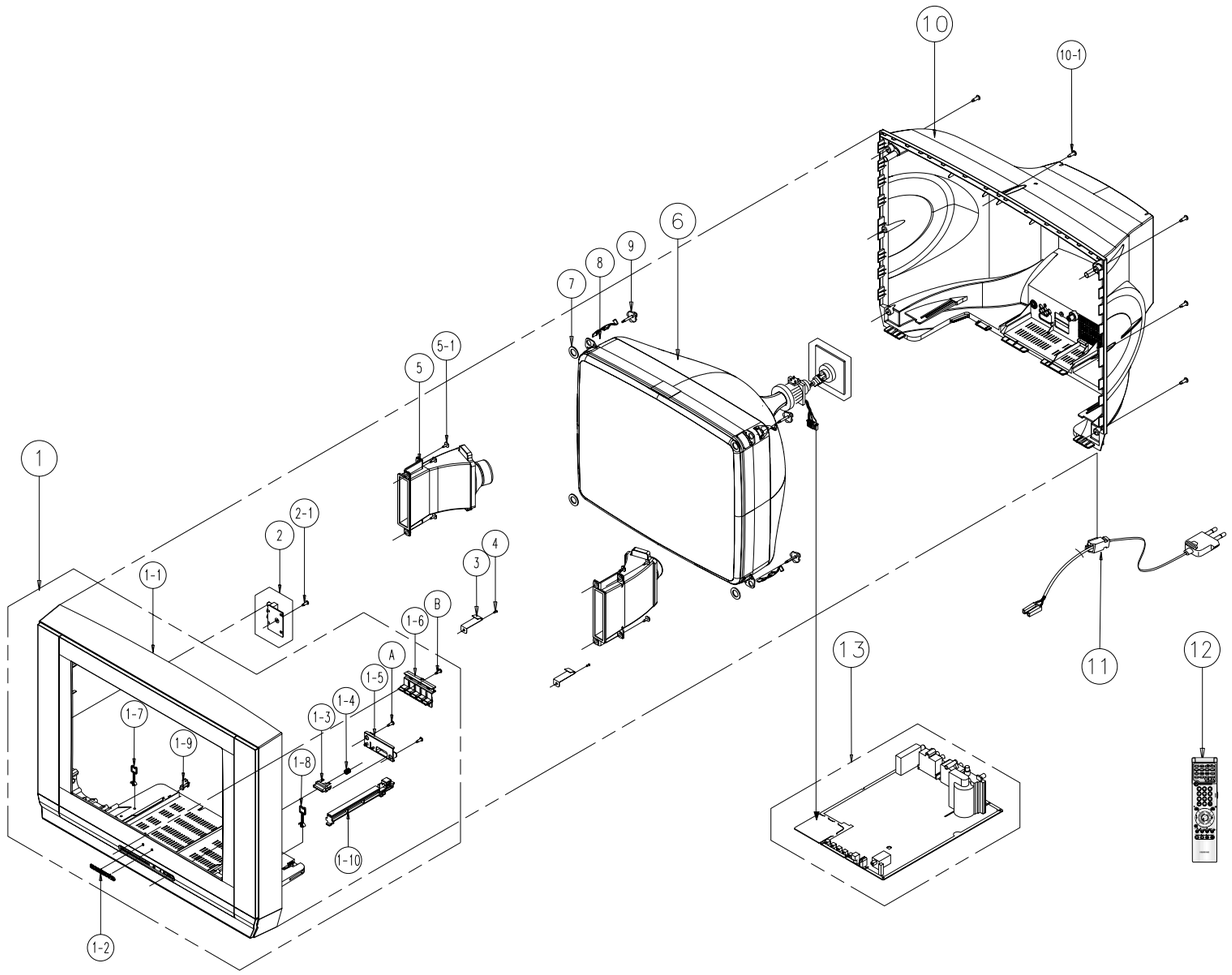

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA98-02095A	ASSY K/D-CABINET FRONT;CS25K10MHPSBWT		1	T0216	
1-1	AA64-03499B	CABINET FRONT;25K10,HIPS,HB,G4309,SV012P		1	CIS3	S.N.A
1-2	AA64-70117B	BADGE-BRAND;,AL,T1.5,10.6,L65,BLK,SILVER		1	T0057	S.N.A
1-3	AA64-03428A	KNOB POWER;21,25,29K10,ABS,HB,G3676,SVM3		1	T0023	S.N.A
1-4	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	CIS7	S.N.A
1-5	AA64-03427A	WINDOW-RMC,LED;21K10(SDMA),PC,ACRYL,CLR		1	T0299	S.N.A
A	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		2	T0081	
1-6	AA64-03429A	KNOB CONTROL;21,25,29K10,ABS,HB,G3676,SV		1	T0022	S.N.A
B	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	T0081	
1-7	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-8	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-9	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1	T0607	S.N.A
1-10	AA61-00711D	HOLDER-PCB;29U1,U2,HIPS VO,BK502(HB-PROP		1	T0245	S.N.A
2	AA95-03194B	ASSY SUB PCB-SIDE A/V;DP,AA95-03194A,S56		1	T0091	
2-1	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR		1	T0081	
3	AA61-10053A	BRACKET-CRATER;7277,STS304,T0.5,-,-,-,-		2		S.N.A
4	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR		2	T0081	
5	AA96-01572B	ASSY SPEAKER P;8ohm,Semidome,10W		1	T0175	S.N.A
5-1	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)		4	SPK+CF	S.N.A
6	AA91-06107A	ASSY CPT;CS25M6WTPS/NWT,A59QDF891X999,+3		1		S.N.A
7	AA60-00055A	SPACER-GUM,CRT;ALL MODEL,NTR RUBBER,-,-,		4	T0609	S.N.A
8	AA65-00019A	CLAMPER CORE-D,COIL;25-34,NYLON 66,V2,N		4		S.N.A
9	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z		4	SC016	
10	AA64-03500B	CABINET BACK;25K10,HIPS,FV2,GR503		1	T0015	
10-1	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,		4	T0081	S.N.A
11	AA96-20109C	ASSY POWER CORD;-,CP2/NO(4.0),H/C300,KKP		1	T0066	S.N.A
12	AA94-13682A	ASSY PCB MAIN;CS25K10,SKD,S56A		1	T0073	
13	AA59-00332A	REMOCON;TM75,DEEP IMPACT,36,G6148,PAL,EX		1	T0074	

6-3 CS21A11MHPSBWT

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

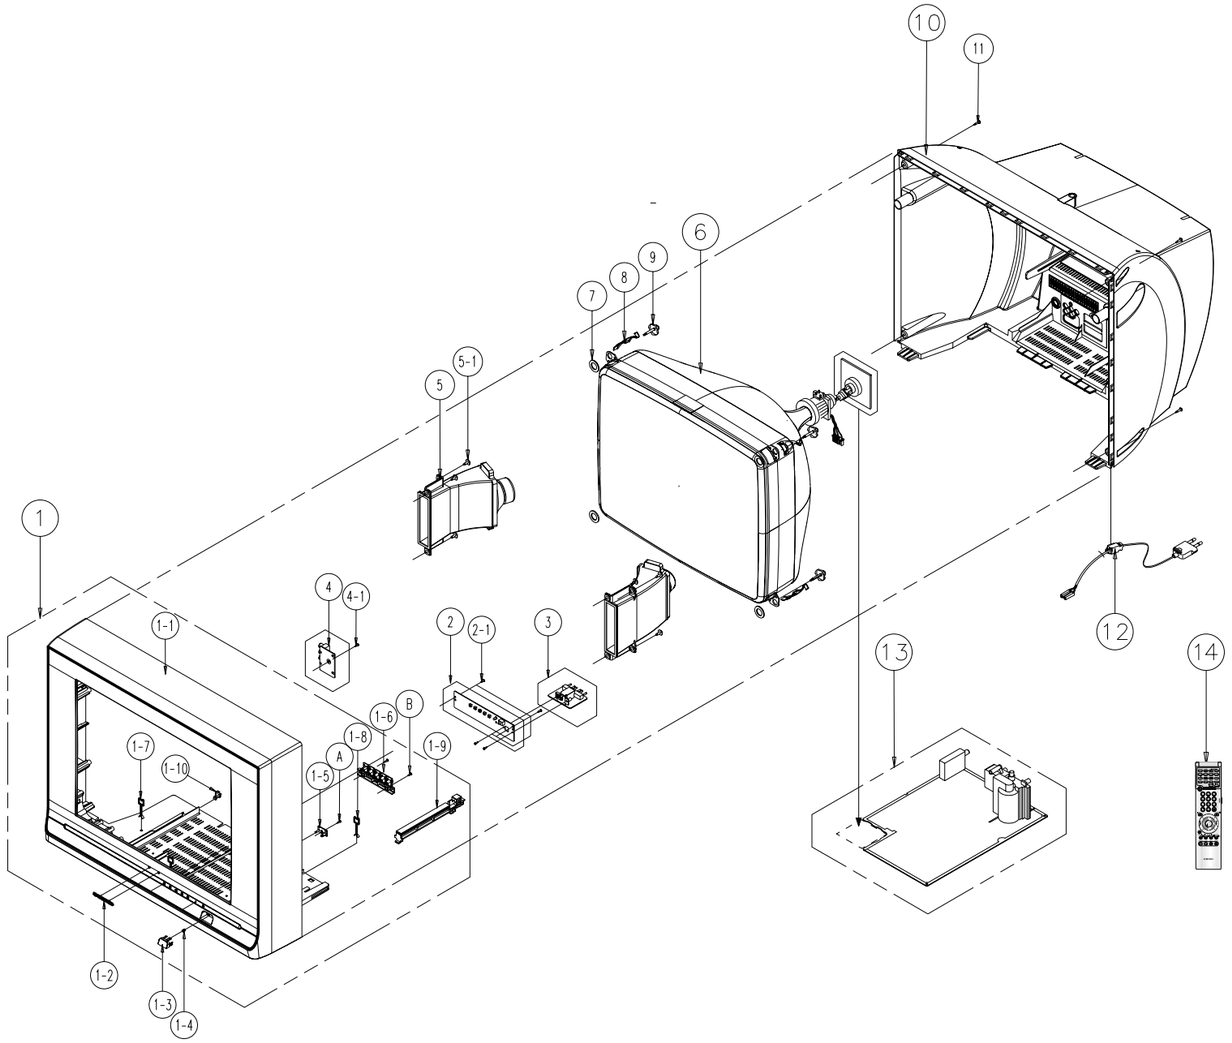

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA98-02095A	ASSY K/D-CABINET FRONT;CS25K10MHPSBWT		1	T0216	
1-1	AA64-03499B	CABINET FRONT;25K10,HIPS,HB,G4309,SV012P		1	CIS3	S.N.A
1-2	AA64-70117B	BADGE-BRAND;,AL,T1.5,10.6,L65,BLK,SILVER		1	T0057	S.N.A
1-3	AA64-03428A	KNOB POWER;21,25,29K10,ABS,HB,G3676,SVM3		1	T0023	S.N.A
1-4	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	CIS7	S.N.A
1-5	AA64-03427A	WINDOW-RMC,LED;21K10(SDMA),PC,ACRYL,CLR		1	T0299	S.N.A
A	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		2	T0081	
1-6	AA64-03429A	KNOB CONTROL;21,25,29K10,ABS,HB,G3676,SV		1	T0022	S.N.A
B	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	T0081	
1-7	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-8	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-9	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1	T0607	S.N.A
1-10	AA61-00711D	HOLDER-PCB;29U1,U2,HIPS VO,BK502(HB-PROP		1	T0245	S.N.A
2	AA95-03194B	ASSY SUB PCB-SIDE A/V;DP,AA95-03194A,S56		1	T0091	
2-1	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR		1	T0081	
3	AA61-10053A	BRACKET-CRATER;7277,STS304,T0.5,-,-,-,-		2		S.N.A
4	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR		2	T0081	
5	AA96-01572B	ASSY SPEAKER P;8ohm,Semidome,10W		1	T0175	S.N.A
5-1	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)		4	SPK+CF	S.N.A
6	AA91-06107A	ASSY CPT;CS25M6WTPS/NWT,A59QDF891X999,+3		1		S.N.A
7	AA60-00055A	SPACER-GUM,CRT;ALL MODEL,NTR RUBBER,-,-,		4	T0609	S.N.A
8	AA65-00019A	CLAMPER CORE-D,COIL;25-34,NYLON 66,V2,N		4		S.N.A
9	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z		4	SC016	
10	AA64-03500B	CABINET BACK;25K10,HIPS,FV2,GR503		1	T0015	
11	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,		4	T0081	S.N.A
12	AA96-20109C	ASSY POWER CORD;-,CP2/NO(4.0),H/C300,KKP		1	T0066	S.N.A
13	AA94-13682A	ASSY PCB MAIN;CS25K10,SKD,S56A		1	T0073	
14	AA59-00332A	REMOCON;TM75,DEEP IMPACT,36,G6148,PAL,EX		1	T0074	